

Split 2.8 RDM

19" Rack Mount, 2 input, 8 output DMX Splitter

Key Features

- 2 input, 8 output DMX splitting
- Flexible output switching
- A/B switch on each DMX output
- Opto Isolated DMX Inputs
- Grounded DMX outputs
- Fully RDM compatible
- Desk Mount or 19" Form Factor
- Worldwide 90-250V AC Power supply



Overview

The Split2.8 RDM from Eaton's Lighting Systems offers flexible DMX/RDM data distribution in a 19" format. Two DMX inputs can be split and output to 8 outputs. Each output is grounded and features an A/B switch for easy selection of which DMX Input to feed to that output. Additionally, each input universe also provides Thru connectivity for further expansion. The flexibility of the Split2.8 RDM makes it equally appropriate for permanent installations and as a flexible, adaptable rental tool, providing buffered outputs of two separate DMX/RDM universes in one unit.


The Split2.8 RDM is fully compatible with the latest RDM protocol, ensuring your DMX distribution network is ready to meet your future demands. The slim 19" enclosure makes it ideal for use alongside the EtherN.8 RDM to build a larger data distribution system.

Permanent installations can make use of the two inputs to provide a low cost switchover between front of house and control room DMX feeds, without the need for patch cables.

Whatever your DMX system, Split2.8 RDM adds flexibility.



Powering Business Worldwide



Ordering Information

0019-000005-00 Split2.8 RDM

Supplied Accessories

Installation / Operating Instructions
IEC C13 to Bare Ends Mains Lead
Rackmount Ears

Mechanical

- Housing: 19" 1U Rack Enclosure
- Material: Metal
- Overall Dimensions: 1RU (H) x 19" Rack (W) x 257mm (D)
- Mass: 2.8Kg
- Mounting: Desktop or 19" Rack Mounting (with supplied rack ears)

Control

- 8 Port DMX / RDM Splitter
- Input Protocols: DMX512, DMX512(1990), DMX512-A
RDM V1.0 (E1.20 - 2006 ESTA Standard)
- Input Connector: 2 x 5pin Male XLR
- Output Protocols: DMX512, DMX512(1990), DMX512-A
RDM V1.0 (E1.20 - 2006 ESTA Standard)
- Output Connector: 8 x 5pin Female XLR with A/B switch per output
- Loop Connector: 2 x 5pin Female XLR

Electrical

- Input Voltage: 90 - 250V AC
- Input Connector: IEC C13 Male
- Input Power (max): 80W
- Duty Cycle: 80% @ 25°C
- Mains Earthing: Case connected to Mains Earth
- Mains Fuse: 3.15A Slow Blow

Isolation

- DMX Input Opto-Isolated to 1kV
- DMX Output - Ground Referenced


Protection

- Mains 3.15A Slow Blow Fuse
- Internal Resettable Fuse - Control Electronics

Environmental

- Operating Temperature: 0°C to 40°C
- Storage Temperature: -10°C to +50°C
- Operating Relative Humidity (max): 80% Non Condensing
- IP Rating: IP20 Indoor Use Only
- Certification: CE FCC, WEEE, RoHS

Dimensions

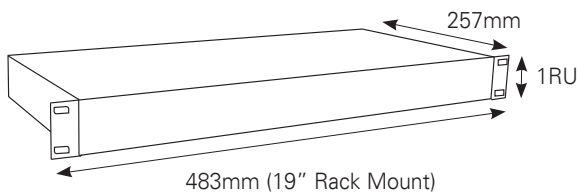

Weight: 2.8Kg

Contact your local Eaton office

Usk House, Lakeside, Llantarnam Park,
Cwmbran, Torfaen, NP44 3HD. UK
T: +44 (0)1633 838088 F: +44 (0)1633 867880
E: enquiries@zero88.com www.zero88.com

Eaton Industries Manufacturing GmbH
Electrical Sector EMEA
Route de la Longeraie
71110 Morges, Switzerland
Eaton.eu

© 2015 Eaton
All Rights Reserved

Split2.8_RDM_Datasheet_UK_Rev3_0615

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.